


ANTI-SKID RESILIENT (ASR) PADS

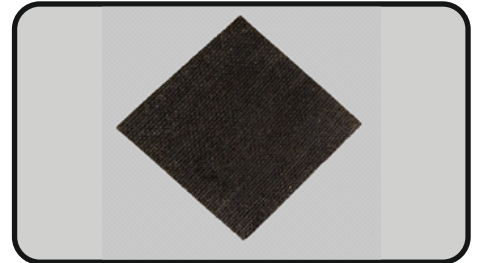

Advantages

- ★ **Grouting Prevention:** Installing your Industrial equipment/ machines on these resilient pads prevents requirement of any kind of bolting and grouting of machine thus no damage to the epoxy flooring.
- ★ **Protection Layer:** The bitumen adhesive pad serves as a protective layer between the machinery and the epoxy flooring. Its thickness of 4mm is sufficient to absorb some of the impact and pressure exerted by the machines during operation.
- ★ **Easy Installation:** These adhesive pads are relatively easy to install. They can be cut to size and simply placed beneath the machines, providing an immediate barrier between the machinery and the floor.
- ★ **Easy to Relocate:** Machines installed on resilient Pads are easy to relocate in case of any shop floor layout change since foundation bolts and anchors are not required to hold the machine.
- ★ **Damping Properties:** Bitumen has damping properties that can help reduce vibrations and noise generated by the machinery.
- ★ **Cost-effective Solution:** Compared to repairing or grouting epoxy flooring frequently due to damage from machinery, using bitumen adhesive pads can be a cost-effective solution in the longer run. It helps to prolong the lifespan of the flooring and reduces maintenance costs.

VIBRO-DAMPFER SOLUTIONS INDIA

Address : #808, 3rd Cross, Kidwai Layout, Jithendar Nagar, Bangalore-560062.

Contact: +91 9778445565 / E-mail:sales@vibro-dampfer.in

www.vibro-dampfer.in